



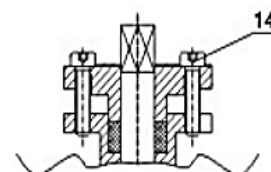


SS304 2-PIECE BODY BALL VALVE - 150 LBS

Model: B01.0502

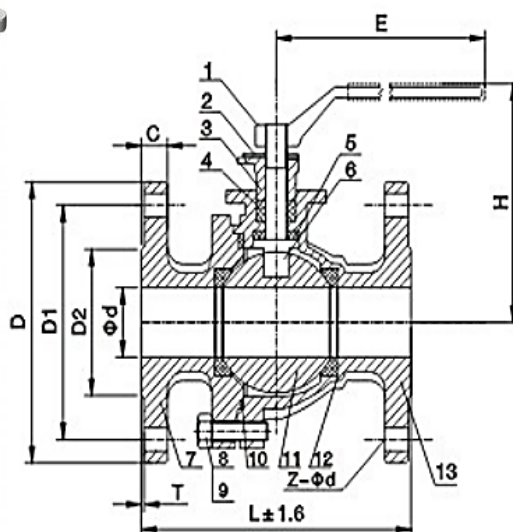

Low Platform



High Platform

SPECIFICATION

DESIGN

ISO 5211 DMP, Full Bore, Blow out Proof Stem

PRESSURE RATING

10 Bar

WORKING TEMPERATURE

Range: -45°C~225°C

OPERATOR

Lever/ Worm Gear/ Pneumatic & Electrical Actuator

CONNECTION

Flange End ANSI 150RF/300RF, ANSI B 16.5

FACE TO FACE

Accordance to ANSI B 16.10.

TESTING

API 598

MATERIAL

Item	Name	Material	Item	Name	Material
1.	Handle	WCB	8.	Nut	201
2.	Orientation Patch	201	9.	Bolt	201
3.	Gland	201	10.	Thrust Gasket	PTFE
4.	Packing	PTFE	11.	Ball	CF8 CF8M WCB
5.	Thrust Gasket	PTFE	12.	Seat	PTFE RPTFE
6.	Stem	304 316	13.	Body	CF8 CF8M WCB
7.	Cap	CF8 CF8M WCB	14.	Hex Screws	201

DIMENSION

Size	1/2"	3/4"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
L	140	152	165	178	190	216	241	282	305	381	403	502
D	95	115	125	135	155	165	190	210	255	280	320	380
D1	66.7	82.6	88.9	98.4	114.3	127	149.2	168.3	200	235	269.9	330.2
D2	34.9	42.9	50.8	63.5	73	92.1	104.8	127	157.2	185.7	215.9	269.9
C	15	16	18	19	21	23	26	29	32	35	37	42
T	2	2	2	2	2	2	2	2	2	2	2	2
Z-Ød	4x 16	4x19	4x 19	4x 19	4x 22	8x 19	8x 22	8x 22	8x 22	8x 22	12x22	12x25