



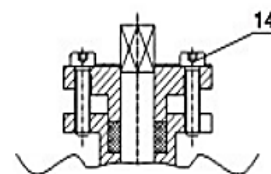


SS304 2-PIECE BODY BALL VALVE - JIS 10K

Model: B01.0402

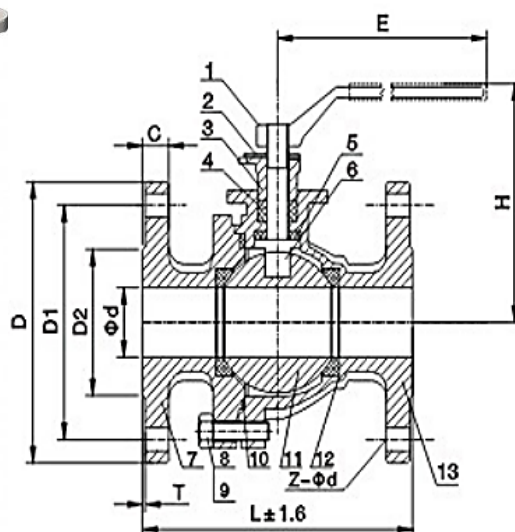

Low Platform

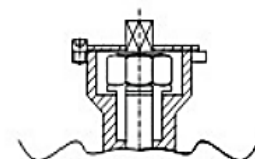

High Platform

SPECIFICATION

DESIGN

ISO 5211 Direct Mounting Pad, Full Bore, Blow out Proof Stem

PRESSURE RATING

10 Bar

WORKING TEMPERATURE

Range: -45°C~225°C

OPERATOR

Lever/ Worm Gear/ Pneumatic & Electrical Actuator

CONNECTION

Flange End JIS 10K, JIS B 2239

FACE TO FACE

JIS B 2002

MATERIAL

Item	Name	Material	Item	Name	Material
1.	Handle	WCB	8.	Nut	201
2.	Orientation Patch	201	9.	Bolt	201
3.	Gland	201	10.	Thrust Gasket	PTFE
4.	Packing	PTFE	11.	Ball	CF8 CF8M WCB
5.	Thrust Gasket	PTFE	12.	Seat	PTFE RPTFE
6.	Stem	304 316	13.	Body	CF8 CF8M WCB
7.	Cap	CF8 CF8M WCB	14.	Hex Screws	201

DIMENSION

Size	1/2"	3/4"	1"	1¼"	1½"	2"	2½"	3"	4"	5"	6"	8"
L	111	120	129	142	167	179	191	205	230	355	395	459
D	93	98	123	133	137	153	174	189	213	247	278	337
D1	70	74	90	100	105	120	138	147	173	210	238	289
D2	52	58	70	80	85	100	110	130	155	185	215	265
C	12	12	12	14	15	16	16	18	20	22	22	23
T	2	2	2	2	2	2	2	2	2	3	3	3
Z-Ød	4x 15	4x 15	4x 19	4x 19	4x 19	4x 19	4x 19	4x 19	8x 19	8x 22	8x 22	12x33